HOT

COLD

Power Supply Unit with Integrated Led Driver	2722 171 90318 PLDE-P007A	2011-01-19

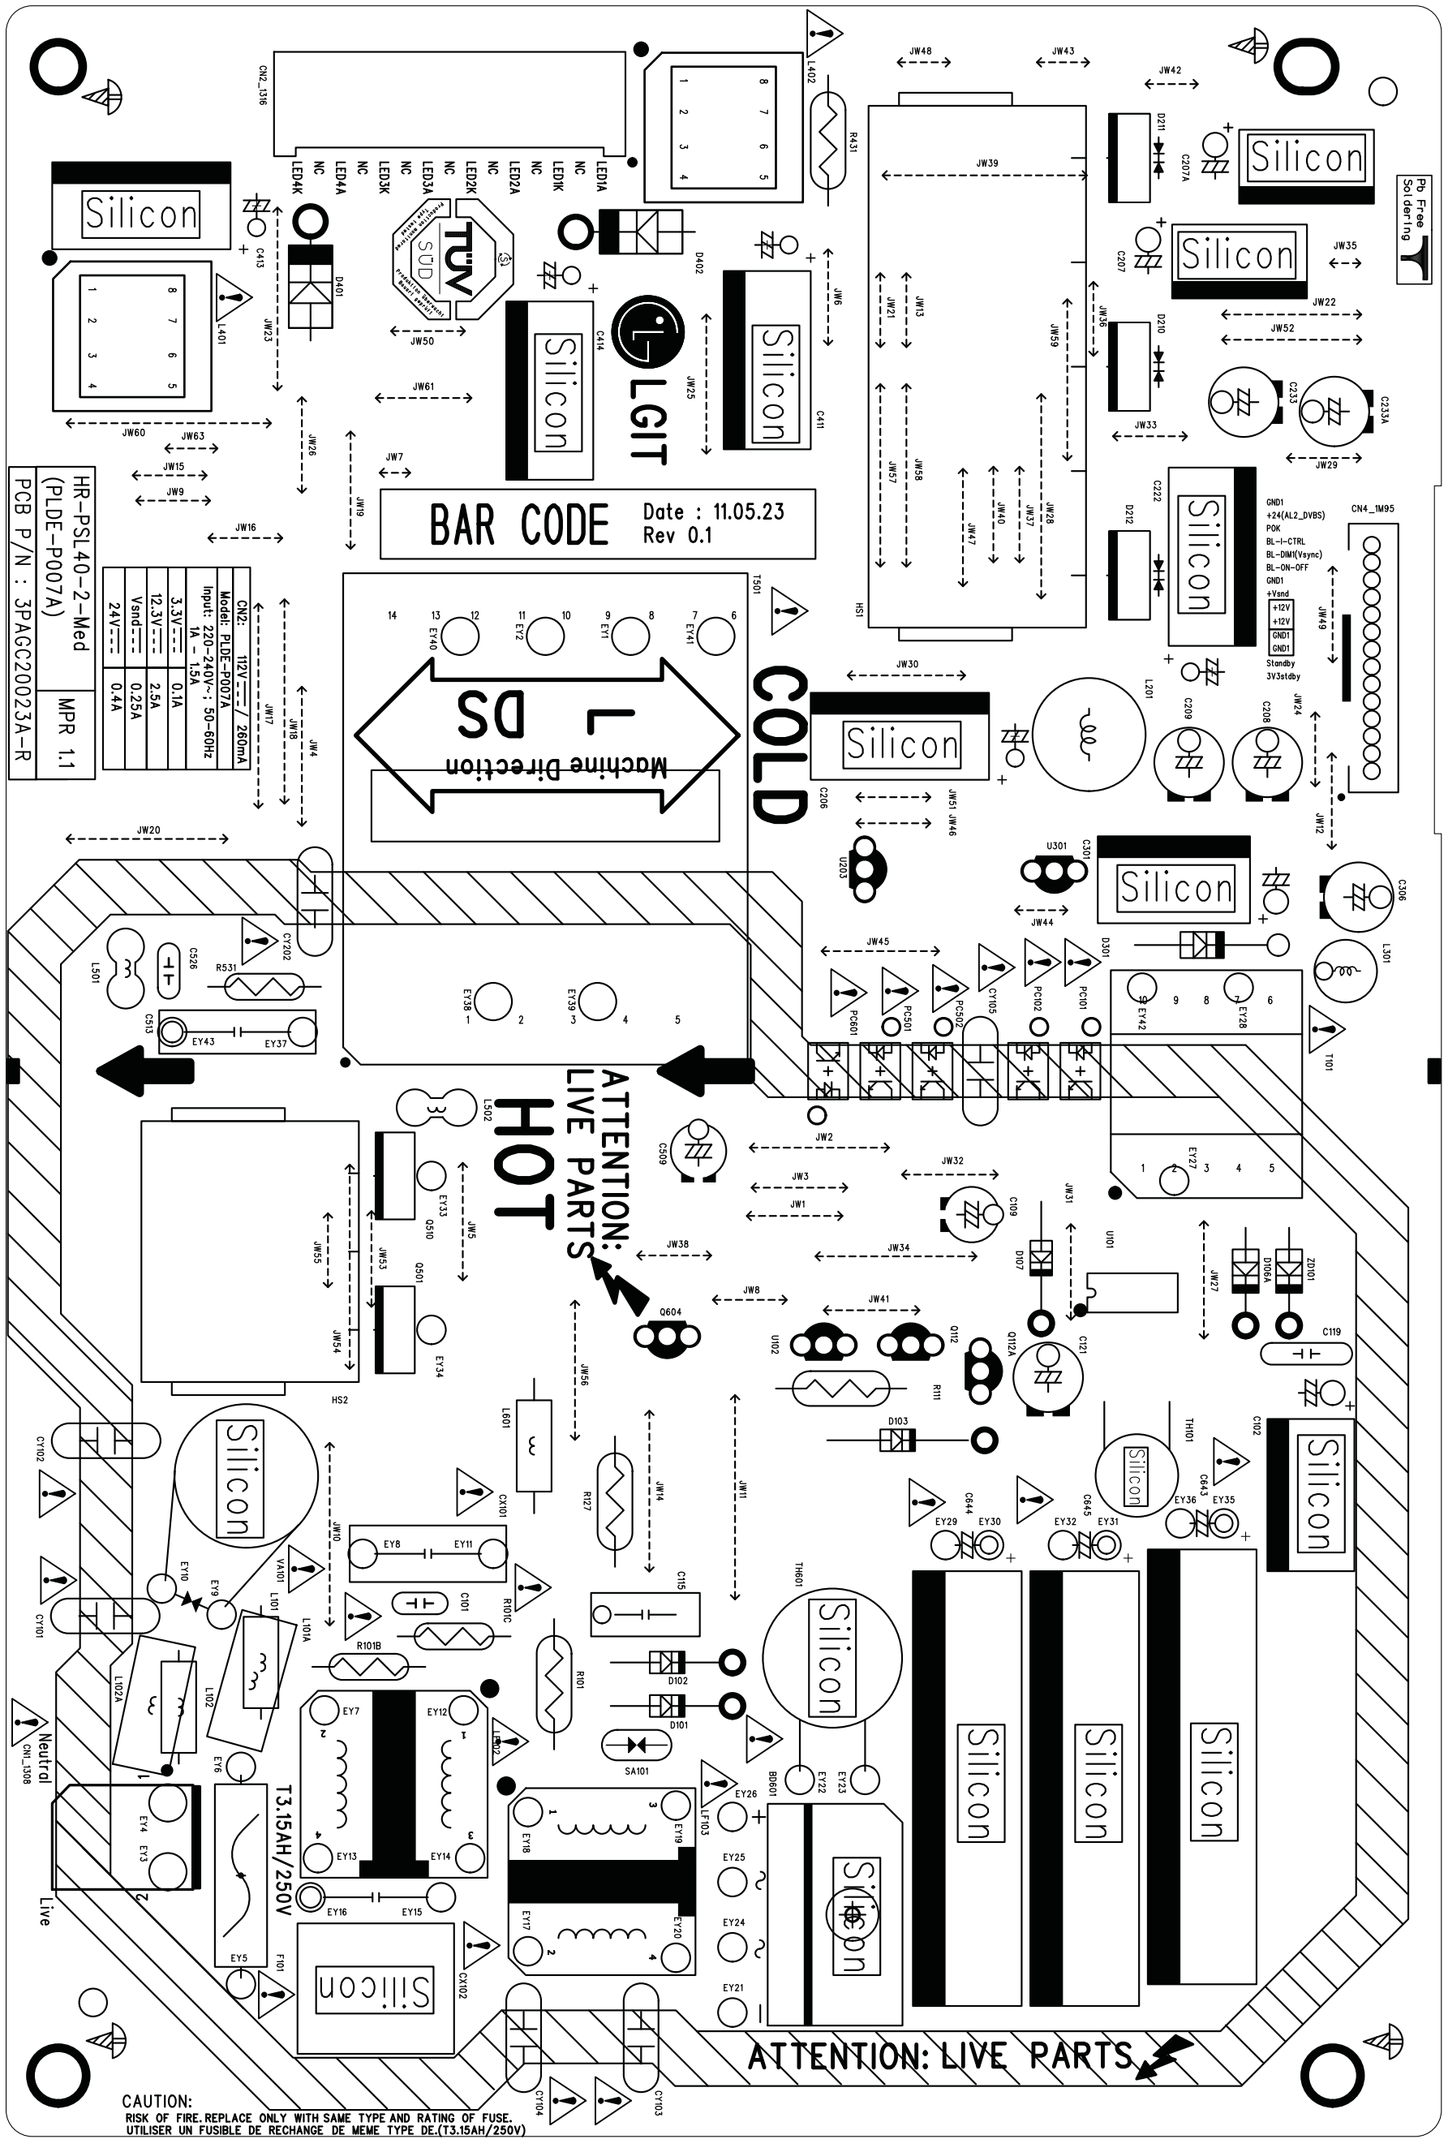
HR-PSL40-2-Med
(PLDE-P007A)
MPR 1.1
PCB P/N : 3PAGC20023A-R
CN2: 112V---/ 260mA
Model: PLDE-P007A
Input: 220-240V~: 50-60Hz
1A - 1.5A
3.3V---: 0.1A
12.3V---: 2.5A
Vsnd---: 0.25A
24V---: 0.4A
BAR CODE
Date : 11.05.23
Rev 0.1
Machine Direction
COLD
HOT
ATTENTION: LIVE PARTS
ATTENTION: LIVE PARTS
T3.15AH/250V
Neutral
Live
Pb Free Soldering
Standby 3V3stdby
CAUTION:
RISK OF FIRE. REPLACE ONLY WITH SAME TYPE AND RATING OF FUSE.
UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE.(T3.15AH/250V)